

G-35R Guitar Amplifier




Features

- 8" guitar speaker design
- 35W RMS (4ohm)
- Dual selectable channels (Clean and Drive)
- Bright boost
- 3—band EQ in channel A and 2-band EQ in channel B for precise tonal shaping
- 9 Powerful built-in DSP effects (Chorus, Flanger, Phase, Rotary, Shift, Delay, Hall, Room and Spring) .
- Stereo auxiliary input for connecting CD player, drum machine etc.
- Headphone output for silent practice


Front&Rearpanel

- | | | |
|----|-------|-------------------------------|
| 1 | ----- | CHA/CHB SWITCH |
| 2 | ----- | CHA-LED |
| 3 | ----- | BRIGHT (BOOST SWITCH) |
| 4 | ----- | VOLUME |
| 5 | ----- | EQUALIZER |
| 6 | ----- | CHB LED |
| 7 | ----- | GAIN |
| 8 | ----- | LEVEL |
| 9 | ----- | EQUALIZER |
| 10 | ----- | EFFLED |
| 11 | ----- | EFF SWITCH |
| 12 | ----- | EFF LEVEL CONTROL |
| 13 | ----- | EFF MODE LED |
| 14 | ----- | EFF MODE/PARAMETER ADJUSTMENT |
| 15 | ----- | INPUT |
| 16 | ----- | AUXINPUT |
| 17 | ----- | HEADPHONE |
| 18 | ----- | POWERSWITCH |

Front Panel

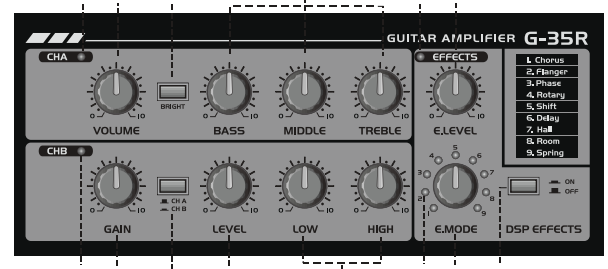

Rear Panel

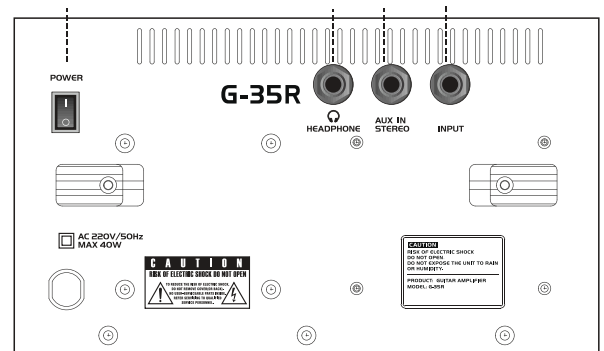

Specifications

RMS.....	35W (4 ohm)
INPUT SENSITIVE/IMPEDANCE	
.....INPUT (CHANNEL A).....	-10dBu/1M Ω
.....AUX IN.....	-10dBu
SPEAKER	20cm (8inch)
CHNNEL A	VOLUME, BASS, MIDDLE, TREBLE,BRIGHT
CHANNEL B.....	GAIN, LEVEL ,HIGH, LOW
EFFECTS.....	E.LEVEL , E.MODE ,EFF ON/OFF
LED.....	CHNNEL A , CHNNEL B ,EFFECTS
CONNECTION (1/4 ").....	INPUT, AUX IN, HEADPHONE (STEREO)
POWER SUPPLY	AC 220V/50Hz
POWER CONSUMPTION	40W
DIMENSION.....	328*242*338 mm
PACKING SIZE	382*287*372mm
NET WEIGHT	8Kg