




Wideband RF Transformers

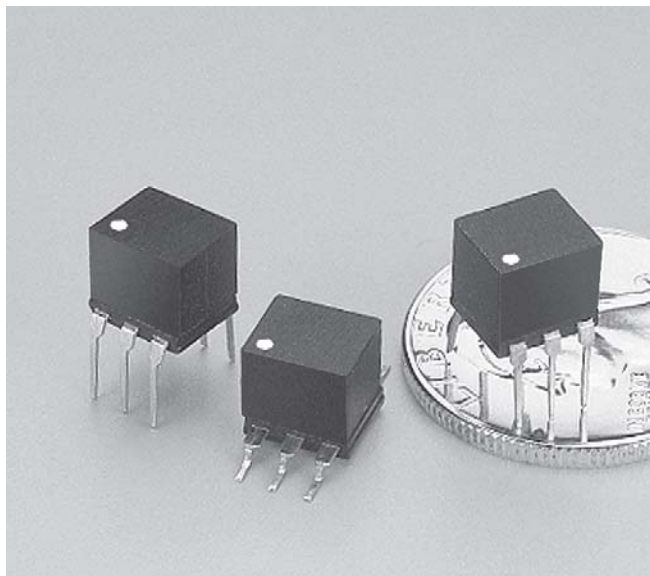

These wideband transformers feature 500 V isolation and a 1/4 Watt RF power rating. They are offered tapped or untapped and are packaged in a low-profile DIP-style plastic case. All parts are available in either a surface mount version or a through-hole version that's compatible with standard DIP sockets. (For a smaller package size and more values, see our TTWB Series.)

Applications include impedance matching, voltage or current transformation, DC isolation, balanced/unbalanced mixing, matching, power splitting, coupling and signal inversion.

Custom wideband transformers with special combinations of impedance ratio, insertion loss, frequency response and current handling are also available.

Schematic	Part number		Impedance ratio pri : sec	I _{DC} max (mA)	Frequency (MHz)	Pins 1-3		Pins 6-4	
	Through-hole	Surface mount ¹				L min ² (μH)	DCR max (Ohms)	L min ² (μH)	DCR max (Ohms)
	WB1010-PCL	WB1010-SML_	1:1	250	0.005 - 100	780	0.320	780	0.320
	WB1010-1-PCL	WB1010-1-SML_	1:1	250	0.04 - 175	95	0.200	95	0.200
	WB1015-PCL	WB1015-SML_	1.5:1	250	0.1 - 150	80	0.145	51	0.130
	WB1040-PCL	WB1040-SML_	4:1	250	0.2 - 300	95	0.160	25	0.115
	WB2010-PCL	WB2010-SML_	1:1	250	0.005 - 100	780	0.320	780	0.320
	WB2010-1-PCL	WB2010-1-SML_	1:1	250	0.04 - 175	95	0.200	95	0.200
	WB2040-PCL	WB2040-SML_	4:1	250	0.2 - 300	95	0.160	25	0.115
	WB3010-PCL	WB3010-SML_	1:1	250	0.005 - 100	780	0.320	780	0.320
	WB3010-1-PCL	WB3010-1-SML_	1:1	250	0.04 - 175	95	0.200	95	0.200
	WB3015-PCL	WB3015-SML_	1.5:1	250	0.1 - 150	80	0.145	51	0.130
	WB3040-PCL	WB3040-SML_	4:1	250	0.2 - 300	95	0.160	25	0.115

1. When ordering, please specify a **packaging** code:

WB3040-SMLD

Packaging: **D** = 13" machine ready reel. EIA-481 embossed plastic tape (500 parts per full reel).

B = Less than full reel. In tape, but not machine ready. To have a leader and trailer added (\$25 charge), use code letter D instead.

2. Inductance tested at 100 kHz, 0.1 Vrms, 0 Adc.
3. 500 Vrms isolation, primary to secondary
4. 1/4 Watt RF power rating
5. Operating temperature range -40°C to +85°C.
6. Electrical specifications at 25°C.

Coilcraft®

Specifications subject to change without notice.

Please check our website for latest information. Document 116-1 Revised 01/31/05



1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469

E-mail info@coilcraft.com Web <http://www.coilcraft.com>



Wideband RF Transformers

Typical Attenuation vs Current

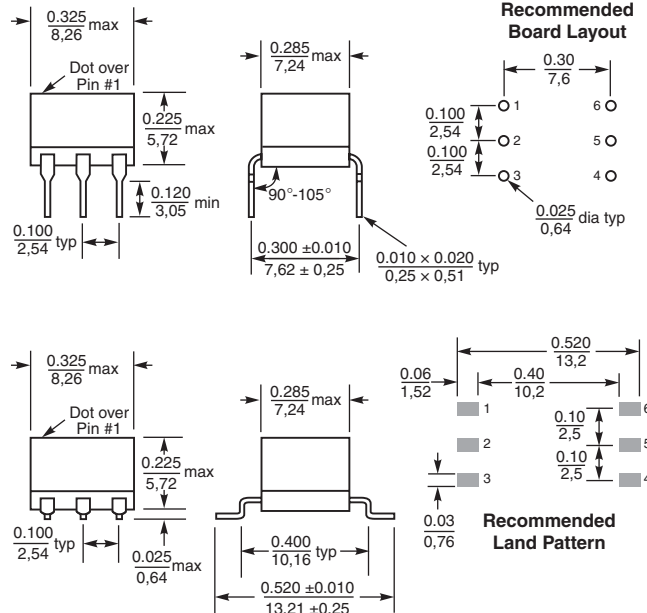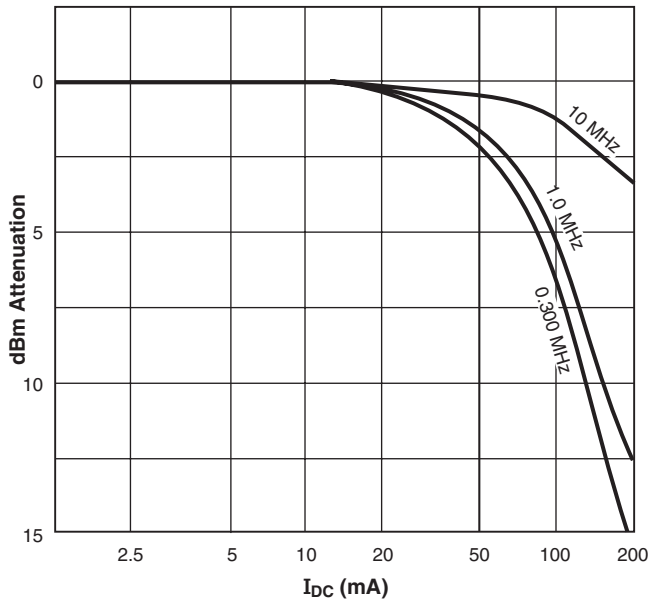


For WB10XX, pins 2 and 5 are removed during manufacture.
 For WB20XX, pin 2 is removed during manufacture.

Terminations: Nickel/tin over copper


Tape and reel for surface mount parts: 500/13" reel 24 mm tape width
 For packaging data see Tape and Reel Specifications section.

Typical Frequency Response


WB1010, WB2010, WB3010
 3 dB bandwidth 0.005 – 100 MHz

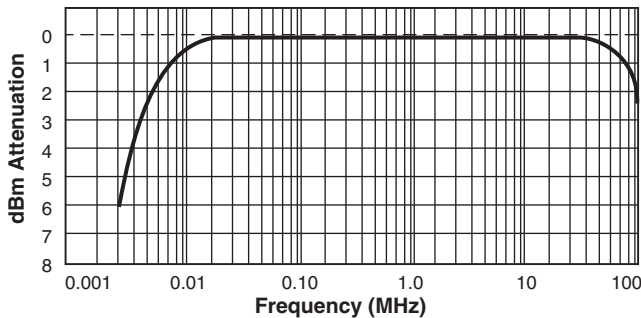


WB1010-1, WB2010-1, WB3010-1
 3 dB bandwidth 0.04 – 175 MHz

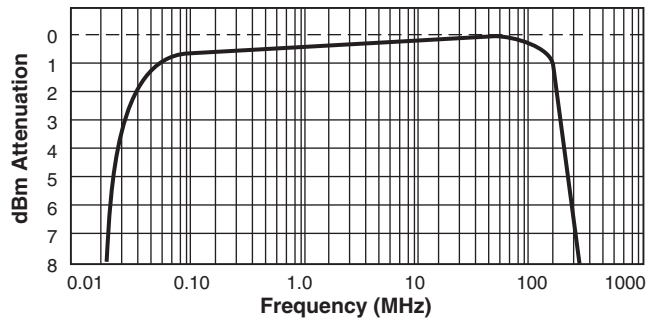

WB1015, WB3015
 3 dB bandwidth 0.1 – 150 MHz

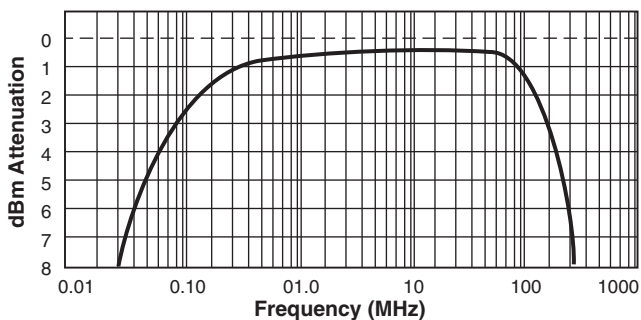

WB1040, WB2040, WB3040
 3 dB bandwidth 0.2 – 300 MHz

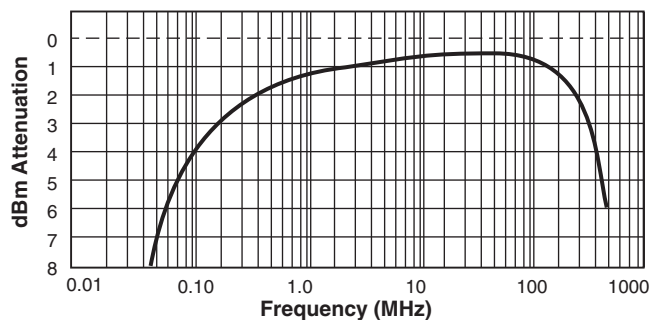

Specifications subject to change without notice.
 Please check our website for latest information. Document 116-2 Revised 01/05/06

1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469

E-mail info@coilcraft.com Web <http://www.coilcraft.com>