


LCE6.5 THRU LCE28A SERIES


LOW CAPACITANCE TRANSZORB™ TRANSIENT VOLTAGE SUPPRESSOR

Stand-off Voltage - 6.5 to 28 Volts Peak Pulse Power - 1500 Watts

Schematic



Case Style 1.5KE

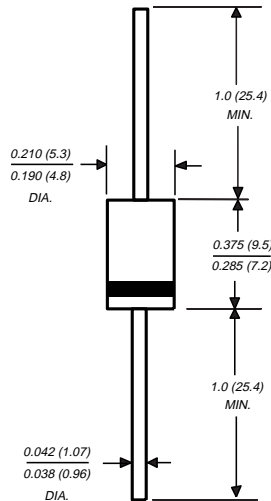

Dimensions in inches
and
(millimeters)

FEATURES

- ◆ Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ◆ Glass passivated junction
- ◆ 1500W peak pulse power capability with a 10/1000 μ s waveform, repetition rate (duty cycle): 0.05%
- ◆ Excellent clamping capability
- ◆ Low incremental surge resistance
- ◆ Fast response time: typically less than 5.0ns from 0 volts to $V_{(BR)}$
- ◆ Ideal for data line applications
- ◆ High temperature soldering guaranteed: 265°C/10 seconds, 0.375" (9.5mm) lead length, 5lbs. (2.3 kg) tension

MECHANICAL DATA

Case: Molded plastic body over a passivated junction
Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026
Polarity: Color band denotes positive end (cathode)
Mounting Position: Any
Weight: 0.045 ounce, 1.2 grams

MAXIMUM RATINGS AND CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOL	VALUE	UNITS
Peak pulse power dissipation with a 10/1000 μ s waveform (NOTE 1, FIG. 1)	PPPM	Minimum 1500	Watts
Steady state power dissipation, $T_L=75^\circ\text{C}$ with at lead lengths 0.375" (9.5mm)	$P_{M(AV)}$	6.5	Watts
Peak power pulse surge current with a 10/1000 μ s waveform (FIG. 3, NOTE 1)	I _{PPM}	SEE TABLE 1	Amps
Operating junction and storage temperature range	T_J, T_{STG}	-65 to +175	°C

NOTE:

(1) Non-repetitive current pulse, per Fig. 3 and derated above $T_A=25^\circ\text{C}$ per Fig. 2

ELECTRICAL CHARACTERISTICS at ($T_A=25^\circ\text{C}$ UNLESS OTHERWISE NOTED) TABLE 1





PART NUMBER	STAND-OFF VOLTAGE V_{WM} (VOLTS)	BREAKDOWN VOLTAGE $V_{(BR)}$ (VOLTS) MIN / MAX	TEST CURRENT at I_T mA	MAXIMUM REVERSE LEAKAGE AT V_{WM} I_D (μ A)	MAXIMUM CLAMPING VOLTAGE AT I_{PP} V_C (VOLTS)	MAXIMUM PEAK PULSE CURRENT FIG.2 I_{PPM} (AMPS)	MAXIMUM JUNCTION CAPACITANCE AT 0 VOLTS (pF)	WORKING INVERSE BLOCKING VOLTAGE V_{WIB} (VOLTS)	MAXIMUM INVERSE BLOCKING LEAKAGE CURRENT AT V_{WIB} I_D (mA)	MINIMUM PEAK INVERSE BLOCKING VOLTAGE V_{PIB} (VOLTS)
*LCE6.5	6.5	7.22-8.82	10.0	1000	12.3	100	100	75	1.0	100
*LCE6.5A	6.5	7.22-7.98	10.0	1000	11.2	100	100	75	1.0	100
*LCE7.0	7.0	7.78-9.51	10.0	500	13.3	100	100	75	1.0	100
*LCE7.0A	7.0	7.78-8.60	10.0	500	12.0	100	100	75	1.0	100
*LCE7.5	7.5	8.33-10.2	10.0	250	14.3	100	100	75	1.0	100
*LCE7.5A	7.5	8.33-9.21	10.0	250	12.9	100	100	75	1.0	100
*LCE8.0	8.0	8.89-10.9	1.0	100	15.0	100	100	75	1.0	100
*LCE8.0A	8.0	8.89-9.83	1.0	100	13.6	100	100	75	1.0	100
*LCE8.5	8.5	9.44-11.5	1.0	50.0	15.9	94	100	75	1.0	100

ELECTRICAL CHARACTERISTICS at (TA=25°C UNLESS OTHERWISE NOTED) TABLE 1 (Cont'd)

PART NUMBER	STAND-OFF VOLTAGE V _{WM} (VOLTS)	BREAKDOWN VOLTAGE V(BR) (VOLTS) MIN/MAX	TEST CURRENT at I _T (mA)	MAXIMUM REVERSE LEAKAGE AT V _{WM} I _D (μA)	MAXIMUM CLAMPING VOLTAGE AT I _{PP} V _C (VOLTS)	MAXIMUM PEAK PULSE CURRENT FIG.2 I _{PPM} (AMPS)	MAXIMUM JUNCTION CAPACITANCE AT 0 VOLTS (pF)	WORKING INVERSE BLOCKING VOLTAGE V _{WIB} (VOLTS)	MAXIMUM INVERSE BLOCKING LEAKAGE CURRENT AT V _{WIB} I _D (mA)	MINIMUM PEAK INVERSE BLOCKING VOLTAGE V _{PIB} (VOLTS)
*LCE8.5A	8.5	9.44-10.4	1.0	50.0	14.4	100	100	75	1.0	100
*LCE9.0	9.0	10.0-12.2	1.0	10.0	16.9	89	100	75	1.0	100
*LCE9.0A	9.0	10.0-11.1	1.0	10.0	15.4	97	100	75	1.0	100
*LCE10	10	11.1-13.6	1.0	5.0	18.8	80	100	75	1.0	100
*LCE10A	10	11.1-12.3	1.0	5.0	17.0	88	100	75	1.0	100
*LCE11	11	12.2-14.9	1.0	5.0	20.1	74	100	75	1.0	100
*LCE11A	11	12.2-13.5	1.0	5.0	18.2	82	100	75	1.0	100
*LCE12	12	13.3-16.3	1.0	5.0	22.0	68	100	75	1.0	100
*LCE12A	12	13.3-14.7	1.0	5.0	19.9	75	100	75	1.0	100
*LCE13	13	14.4-17.6	1.0	5.0	23.8	63	100	75	1.0	100
*LCE13A	13	14.4-15.9	1.0	5.0	21.5	70	100	75	1.0	100
*LCE14	14	15.6-19.1	1.0	5.0	25.8	58	100	75	1.0	100
*LCE14A	14	15.6-17.2	1.0	5.0	23.2	65	100	75	1.0	100
*LCE15	15	16.7-20.4	1.0	5.0	26.9	56	100	75	1.0	100
*LCE15A	15	16.7-18.5	1.0	5.0	24.4	61	100	75	1.0	100
*LCE16	16	17.8-21.8	1.0	5.0	28.8	52	100	75	1.0	100
*LCE16A	16	17.8-19.7	1.0	5.0	26.0	57	100	75	1.0	100
*LCE17	17	18.9-23.1	1.0	5.0	30.5	49	100	75	1.0	100
*LCE17A	17	18.9-20.9	1.0	5.0	27.6	54	100	75	1.0	100
*LCE18	18	20.0-24.4	1.0	5.0	32.2	46	100	75	1.0	100
*LCE18A	18	20.0-22.1	1.0	5.0	29.2	51	100	75	1.0	100
*LCE20	20	22.2-27.1	1.0	5.0	35.8	42	100	75	1.0	100
*LCE20A	20	22.2-24.5	1.0	5.0	32.4	46	100	75	1.0	100
*LCE22	22	24.4-29.8	1.0	5.0	39.4	38	100	75	1.0	100
*LCE22A	22	24.4-26.9	1.0	5.0	35.5	42	100	75	1.0	100
*LCE24	24	26.7-32.6	1.0	5.0	43.0	35	100	75	1.0	100
*LCE24A	24	26.7-29.5	1.0	5.0	38.9	39	100	75	1.0	100
*LCE26	26	28.9-35.3	1.0	5.0	46.6	32	100	75	1.0	100
*LCE26A	26	28.9-31.9	1.0	5.0	42.1	36	100	75	1.0	100
*LCE28	28	31.1-38.0	1.0	5.0	50.1	30	100	75	1.0	100
*LCE28A	28	31.1-34.4	1.0	5.0	45.5	33	100	75	1.0	100

+ UL listed for Telecom application protection 497B. file number E136766

RATINGS AND CHARACTERISTIC CURVES LCE6.5 THRU LCE28A SERIES

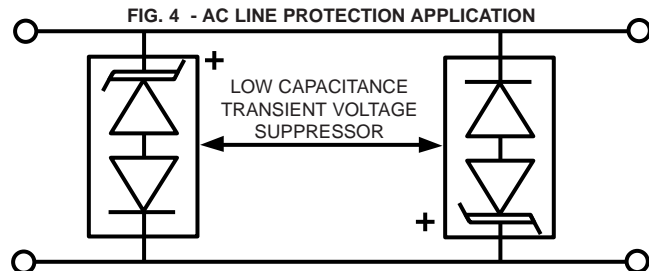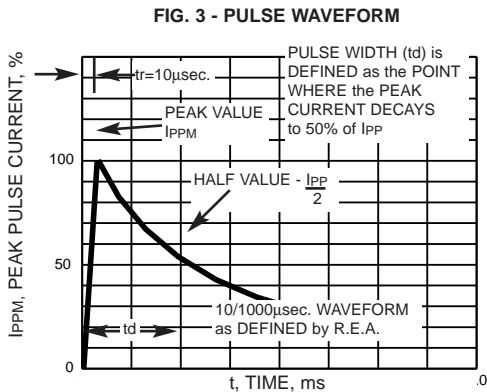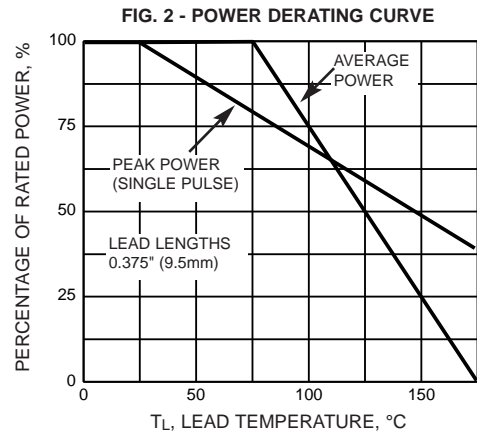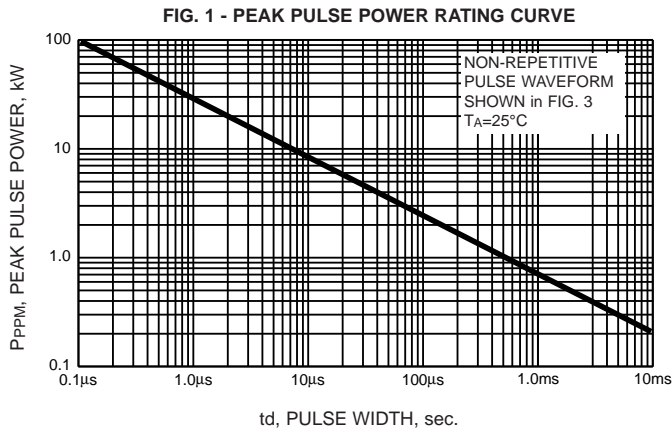

APPLICATION NOTE: Device must be used with two units in parallel, opposite in polarity as shown in circuit for AC signal Line protection

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.