





RATED VOLTAGE	設定電壓
OPERATING VOLTAGE	電壓範圍
☆ RATED CURRENT	消耗電流
☆ SOUND PRESSURE LEVEL AT 10 CM	輸出音壓
COIL RESISTANCE	線圈電阻
RATED FREQUENCY	額定頻率
OPERATING TEMP. RANGE	操作溫度
STORAGE TEMP. RANGE	儲存溫度
WEIGHT	重量
TERMINAL	導線

Dimensions (Unit: mm ± 0.2)

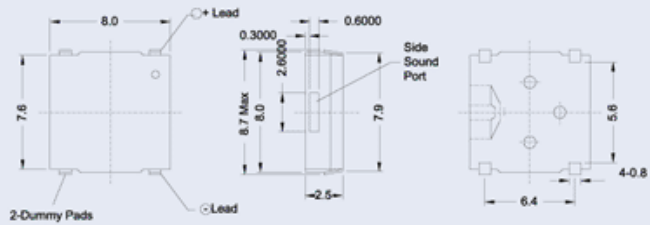

HOUSING MATERIAL : LCP

Frequency Response



FEATURES

- SMD small size
- Side opening for sound emission

適用範圍

- SMD小尺寸
- 側孔發音

☆ Value applying rated voltage (resonant frequency, 1/2 duty square wave)

OBO-25AL1

3.0VDC
2~4V
max. 100mA
min. 81dB
16 ± 3Ω
2,300Hz
-20°C to +60°C
-40°C to +85°C
0.4gm
SMD Type

OBO-25AP1

3.0VDC
2~4V
max. 100mA
min. 83dB
16 ± 3Ω
2,700Hz
-20°C to +60°C
-40°C to +85°C
0.4gm
SMD Type

音源裝置 音源裝置 Magnetic Transducer