


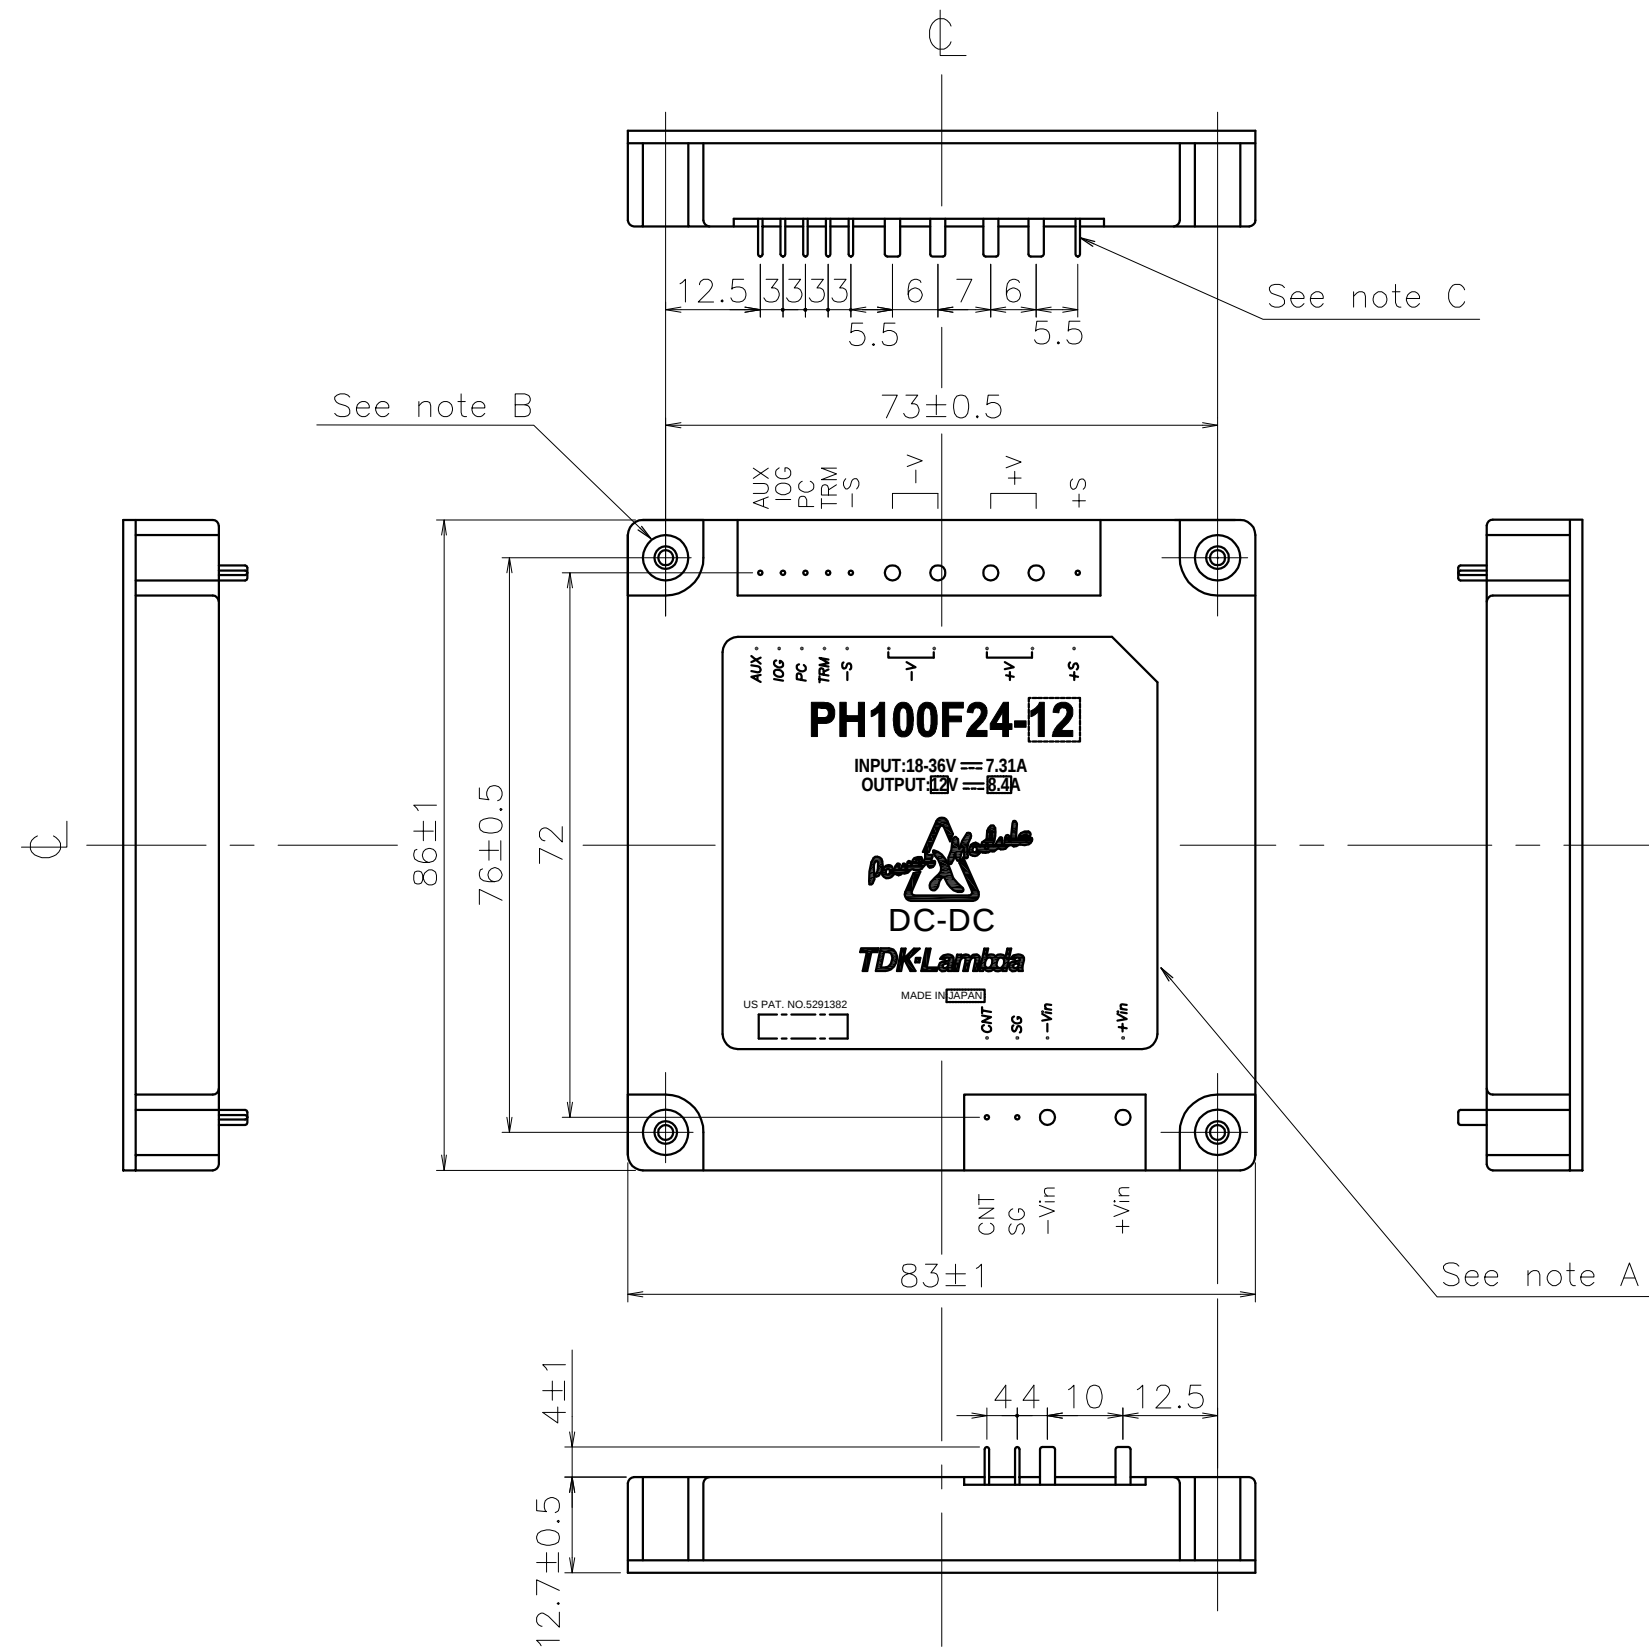

Notes

A: Model name, input voltage range, nominal output voltage, maximum output current and country of manufacture are shown here in accordance with the specifications.

B: M3 tapped holes 4 for customer chassis mounting (FG). Screws must not protrude into power module by more than 12.7mm. (Back side for heat sink.)

C: Input and output terminal... (6- $\phi 2$
8- $\phi 0.6$)

(unit : mm)
 MODEL PH100F24-*
DENSEI-LAMBDA
 C101-02-01C